


$$F_v = 2758 \times 0,83 = 2289 \text{ kg/m}^2$$

$$F_p = 236 \times 0,83 = 196 \text{ kg}$$

~~oel V2A 1.4301~~  
~~V4A 1.4571~~ } ČSN EN 10088-1 ~~(AISI 304)~~  
~~(AISI 316 Ti)~~

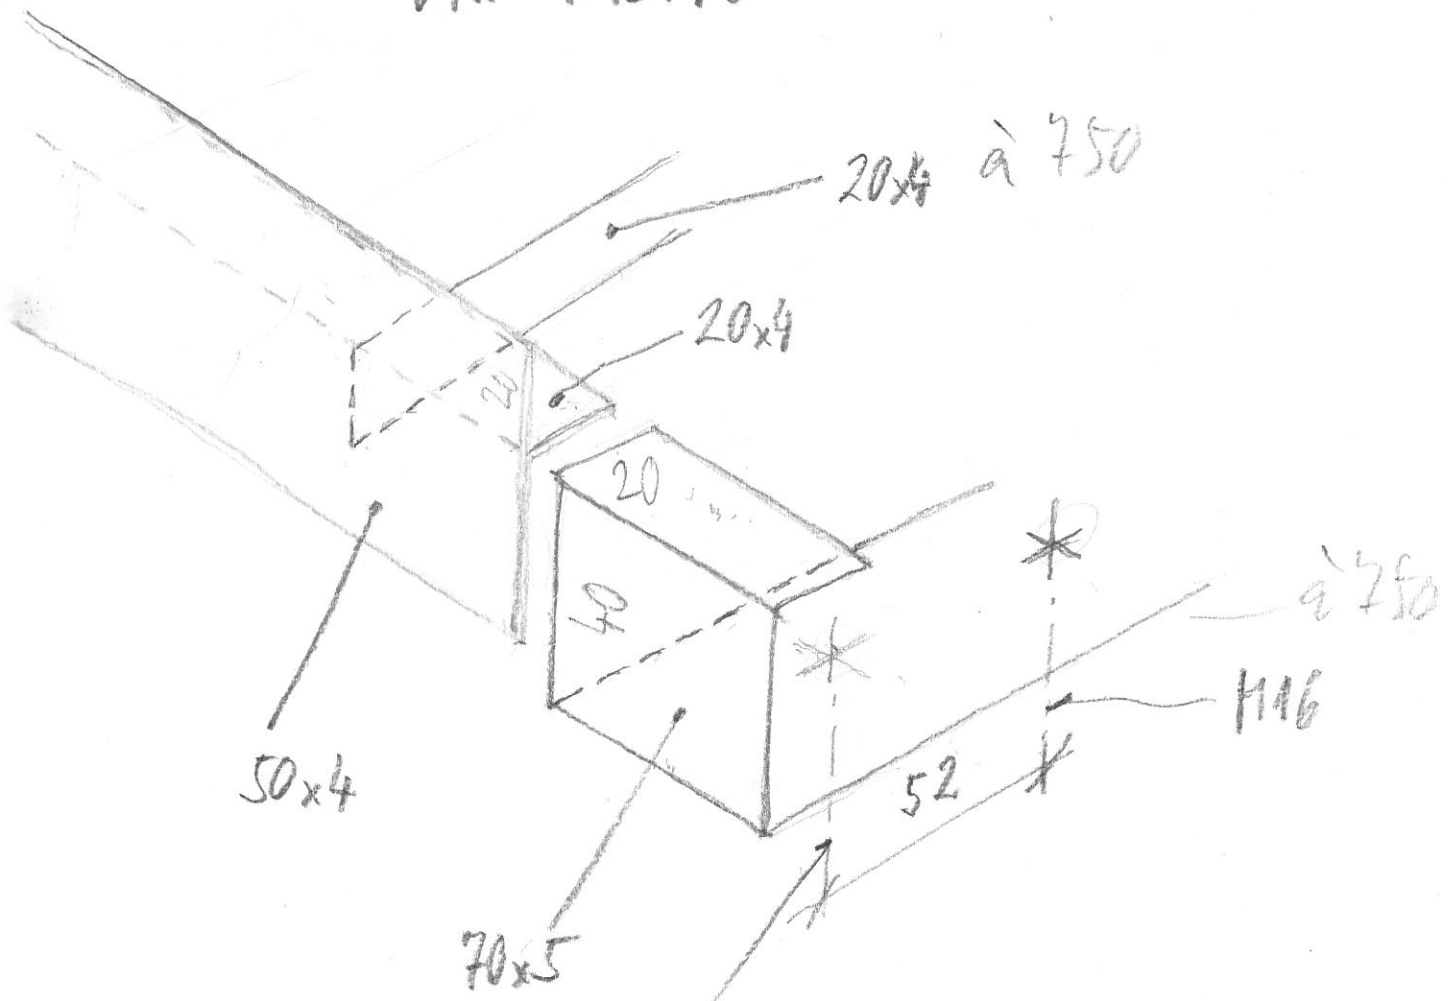

H16 - max. V = 76 mm

17.4

130

190

3.0